



Self-drilling Screw, Hexagon Washer Head

Type K (Hexagon Washer Head)

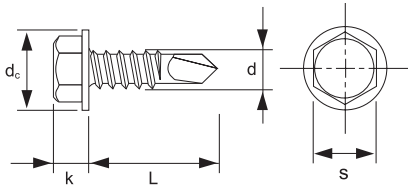

Product Specifications

Material	Case hardening or heat treatable steel
	Grade 410 stainless steel
	Bi-metal - Grade A2 stainless steel (body) + carbon steel (drill tip)
	Bi-metal - Grade A4 stainless steel (body) + carbon steel (drill tip)
	Grade A2 stainless steel
Specification	DIN 7504K
	Grade A4 stainless steel
Finishing	Zinc Plated to ISO 4042 (for steel)
	BS EN ISO 3506 (for A2/A4 stainless steel)

Dimensions

Thread size	d	ST3.5 (#6)	ST4.2 (#8)	ST4.8 (#10)	ST5.5 (#12)	ST6.3 (#14)
Thread pitch	P	1.3	1.4	1.6	1.8	1.8
Washer head diameter	d_c max.	8.3	8.8	10.5	11.0	13.2
Socket width	s max.	5.5	7	8	8	10
Height of head	k max.	3.45	4.25	4.45	5.45	6.45

all unit in mm unless specified

*Nominal length L(mm) 10,12,16,19,25,32,37,50,62,75,87,100



* check stock length before order; other sizes and lengths available on request

Ordering Example

Part No.	Description
SHWSDSN1025ZP	ST4.8(#10)x25mm Hexagon Washer Head Self-drilling Screw, Zinc Plated (ZP)
SHWSDSN1025SS410	ST4.8(#10)x25mm Stainless Steel Hexagon Washer Head Self-drilling Screw (SS410)
SHWSDSN1025BIA2	ST4.8(#10)x25mm Bi-Metal A2 Stainless Steel Hexagon Washer Head Self-drilling Screw (SS304)
SHWSDSN1025A4	ST4.8(#10)x25mm A4 Stainless Steel Hexagon Washer Head Self-drilling Screw (SS316)

Self-drilling Screw, Cross Recessed Countersunk Flat Head

Type H (Phillips Head)

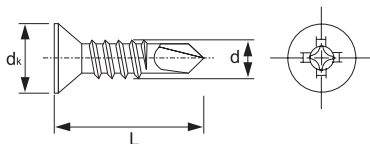

Product Specifications

Material	Case hardening or heat treatable steel
	Grade 410 stainless steel
	Bi-metal - Grade A2 stainless steel (body) + carbon steel (drill tip)
	Bi-metal - Grade A4 stainless steel (body) + carbon steel (drill tip)
	Grade A2 stainless steel
Specification	DIN 7504P
	Grade A4 stainless steel
Finishing	Zinc Plated to ISO 4042 (for steel)
	BS EN ISO 3506 (for A2/A4 stainless steel)

Dimensions

Thread size	d	ST3.5 (#6)	ST4.2 (#8)	ST4.8 (#10)	ST5.5 (#12)	ST6.3 (#14)
Thread pitch	P	1.3	1.4	1.6	1.8	1.8
Head diameter	d_k max.	6.8	8.1	9.5	10.8	12.4
Height of head	k max.	2.1	2.5	3	3.4	3.8
Cross recess no.		2	2	2	3	3

all unit in mm unless specified

*Nominal length L(mm) 10,12,16,19,25,32,37,50,62,75,87,100

* check stock length before order; other sizes and lengths available on request

Ordering Example

Part No.	Description
SPFSDSN1025ZP	ST4.8(#10)x25mm Phillips CSK Flat Head Self-drilling Screw, Zinc Plated (ZP)
SPFSDSN1025SS410	ST4.8(#10)x25mm Stainless Steel Phillips CSK Flat Head Self-drilling Screw (SS410)
SPFSDSN1025BIA2	ST4.8(#10)x25mm Bi-Metal A2 Stainless Steel Phillips CSK Flat Head Self-drilling Screw (SS304)
SPFSDSN1025A4	ST4.8(#10)x25mm A4 Stainless Steel Phillips CSK Flat Head Self-drilling Screw (SS316)